

Mode Akusto

FLOOR SCREEN

Design Juha Lätti / Juri Karinen

Mode Akusto series can be used to create easily modifiable assemblies. The free-standing floor partitions can be used individually or linked together to divide larger spaces. Mode Akusto improves the acoustics and peacefulness of the premises, as the partitions are effectively dampening noises from the surrounding environment. Panels have been designed to absorb the sounds from within and outside the assemblies. Sound proofing class: B. The fiber material used has M1 emission classification and has been approved by the Finnish Allergy and Asthma Federation.

Materials and finishing

Leg	White, black, silver, graphite gray. With or without castors.
Upholstery	ISKU standard partition fabrics; Blazer Lite, Event Screen+, Soul, Xpress
Accessories	Whiteboard, Mode Acrylic

Dimensions

Width	820 / 1220 / 1420 / 1620 / 1820 / 2020 mm
Depth	43 mm
Height	1260 mm / 1270 mm with castors 1640 mm 1800 mm



Mode Akusto

MODE AKUSTO FLOOR

Datasheet


*No screws are needed when mounting the panels on top of the supporting legs, but there are screw holes in both the legs and the panel if screws are preferred.

*There are 2 legs for each panel.


*With bigger assemblies, panels can be connected with standard stick-on labels (quick, but also firm) or metallic connectors (T & L), based on the needs of the customer and space.

*Due to flexibility of the supporting legs, panels are easily installed and will not fall in case someone bumps into them. Supporting legs fit under the legs of electric tables, which allows installing the panels firmly around the workstation.

Measures:

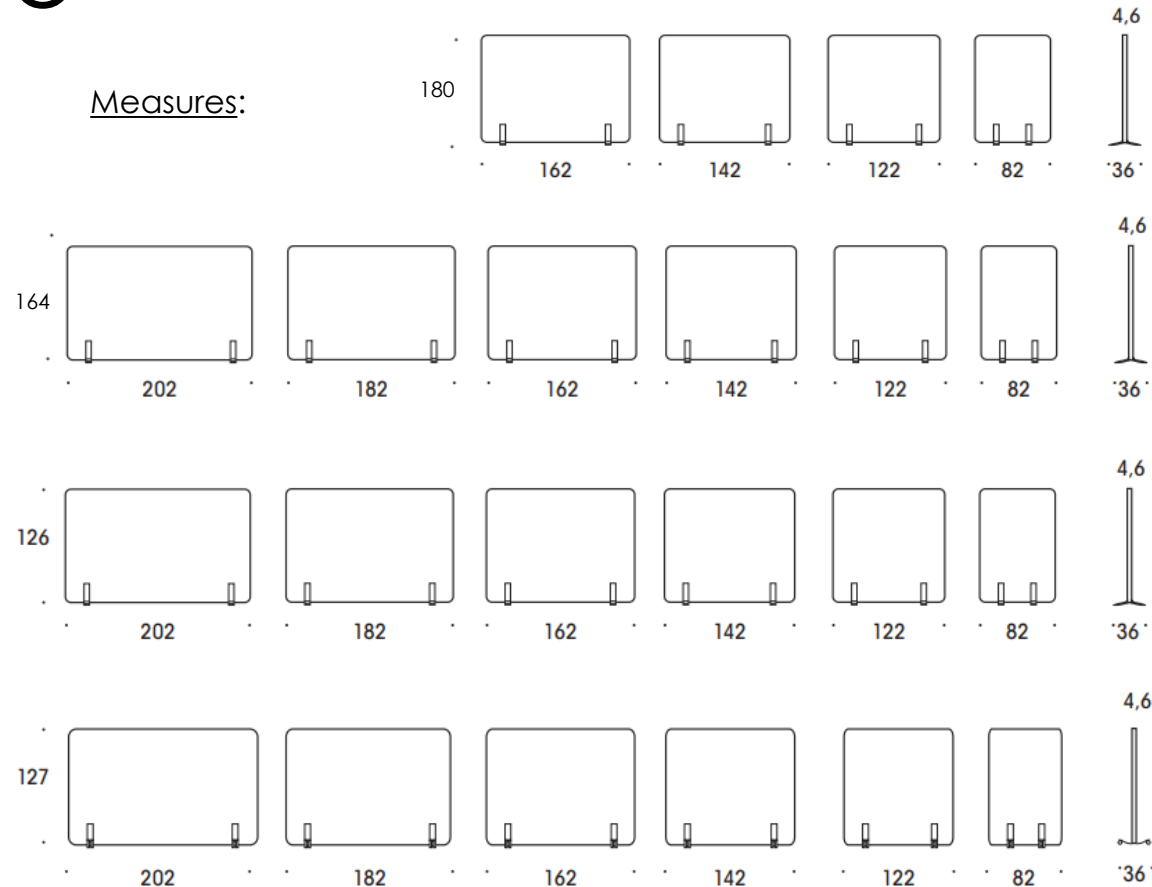

Example of uses:

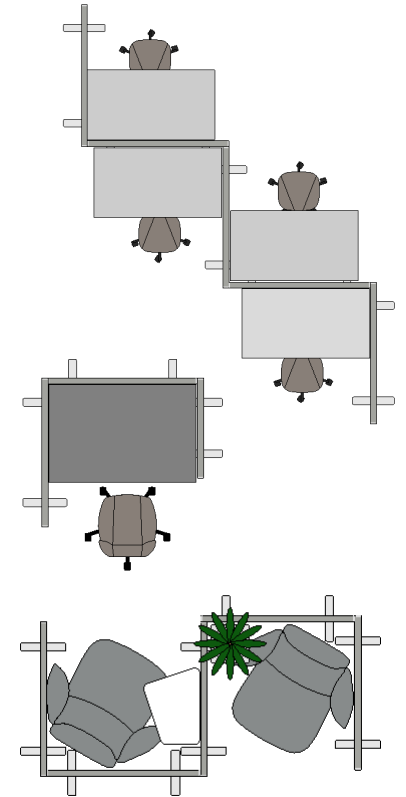

Interconnecting fitting T



Interconnecting fitting L



Leg



Leg with castors



Mode Akusto floor

ISKU
Since 1928



Mode Akusto floor

ISKU
Since 1928



Mode Akusto floor



Mode Akusto floor

ISKU
Since 1928

Mode Akusto

TABLE SCREEN

Design Juha Lähti / Juri Karinen

Mode Akusto series can be used to create easily modifiable assemblies. The Mode Akusto front panels are attached to the table, which creates a sheltered and pleasant workstation. Mode Akusto improves the acoustics and peacefulness of the premises, as the panels are effectively dampening noises from the surrounding environment. Panels have been designed to absorb the sounds from within and outside the assemblies. Sound proofing class: B. The fiber material used has M1 emission classification and has been approved by the Finnish Allergy and Asthma Federation.

Materials and finishing

Upholstery	ISKU standard partition fabrics; Blazer Lite, Event Screen+, Soul, Xpress
Attachment	Many different attachment options, see datasheet.
Accessories	Mode acrylic

Dimensions

Width	800 / 1200 / 1400 / 1600 / 1800 / 2000mm
Depth	40mm
Height	470 / 700mm















Mode Akusto

MODE AKUSTO TABLE

Datasheet

Wires and cables can be carried between table top and the front panel, and it also allows attaching various accessories to the table top.

	800	1200	1400	1600	1800	2000
470mm						
700mm						



Angle brackets



End panel supports



Top supports



Bottom supports



Fixing D



Mode Akusto table

ISKU
Since 1928



Mode Akusto table

ISKU
Since 1928

Mode Acrylic

MODE ADD ON ACRYLIC

Datasheet

**Accessory for floor or table
Mode Akusto screen.**

Select the size according to the
Mode floor or table screen.

Acrylic sheet:
frosted or clear

Fastener colour options:
silver, black or white.

