

# Vetrospace XS+

## Pod for 1

A VETROSPACE IS MORE THAN JUST A POD – IT'S A PRODUCTIVE, PRIVATE, AND SAFE SPACE FOR WORKING, MEETING, AND COLLABORATING.

XS+ Hybrid is a new pod type focusing on hybrid working. It is planned for longer periods of focused work or for longer duration teleconferencing and webcasting. You have enough of space for a comfortable chair and a table that is large enough for notebooks, laptop etc. It has optionality between fixed and electrically adjustable table and the separately dimmable ambient and facial lights gives you a natural look for every meeting.

XS+ is optimized against audio and visual snooping, has a motion sensor for smart control of lighting and air flow.

### Materials and finishing

Exterior material is LP-laminate and 11 mm sound-controlled safety glass. Laminates in 6 standard colors, plus options for custom colors.

Interior is acoustic ECOfelt lining, with 5 standard colors and >50 additional colors.

### Dimensions

Width	150 cm
Depth	110 cm
Height	225 cm
Weight	550 kg




# Vetrospace XS+

Pod for 1

Datasheet

XS+ comes with two structure options, meaning you can choose to have glass on two walls (structure 5), or only the glass door (structure 2).

XS+ has retractable wheels underneath for ease of moving the pod within a floor of a building. The basic single state coarse (G4) air filtering, keeps the inner air fresh and clean, and in normal use to be changed only two times a year.

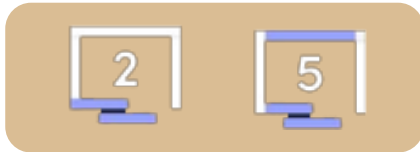

Plug-and-play  
solution




Best-in-class  
soundproofing



Antimicrobial  
LED lighting



Built-in wheels for  
easy relocation



Excellent ventilation  
for fresh air

## TECHNICAL SPECS

### Exterior dimensions

W150 / D110 / H225 cm | W59.1 / D43.3 / H88.6 in

### Exterior material

LP-laminate

### Interior dimensions

W130 / D100 / H207.5 cm | W51.2 / D39.4 / H81.7 in

### Interior material

Acoustic ECOfelt lining

### Weight

550 kg | 1210 lbs (TBC)

### Indoor surface area

1.4 m<sup>2</sup> | 15 ft<sup>2</sup>

### Installation height requirement

235 cm | >92.5 in

### Fire safety

UL 723: Class A-C (surface)  
ASTM E648: Class 1 (flooring)

### Electrical safety

IEC 60335-1:2020 | UL 962 (E514776)

### Seismic safety

Special SEISMIC Certification (2019-0176-COC-01-00)  
International Building Code (IBC) 2018 (23.02.2021)  
California Building Code (CBC) 2019 (23.02.2021)

### Door

Hinged door

### Glass thickness

11 mm | 0.43 in sound-control safety glass

### Sound reduction

D<sub>s,A</sub> 30dB (ISO 23351-1), STI: 0.05

### Ventilation system

Basic single state coarse (G4) air filtering

### Air flow

Min 10 l/s, typical 20 l/s\* and max 58 (max fan capacity)

### Pressure

Positive air pressure

### Power supply

110-240 VAC / 16 A / 50-60 Hz

### Power

50 W average, 150 W maximum (TBC)

### Power sockets

1 as standard

\* The pod is equipped with smart CO2 based ventilation control, typical value is based on average occupancy & CO2 exhaled by users and will vary based on measured value real time.



Vetrospace XS+